

ComNav®




1440 Autopilot

Handheld User Friendly Autopilot For Accurate Steering

- Clip mounted allowing both fixed and hand held operation
- Suitable for small to mid-sized vessels
- Capable of operating on most standard types of steering systems
- Waterproof Control Head
- Automatic yaw, sea state and trim
- Optional full function remote
- "Nav" mode accepts NMEA 0183 information
- Digital display of rudder angle and operating mode
- Optional analog rudder angle indicator
- One NMEA 0183 Heading Output (HDM & HDG)
- Large LCD display with eight brightness levels for comfortable viewing
- Built-in diagnostics and self tests plus visual and audible alarms
- Reliable in any sea and weather condition
- Easy to install and fully compatible with your onboard instruments
- Ten selectable steering parameters for both Fast and Slow modes
- Extended 3 year warranty
- Meets CE requirements

1440 Autopilot

A basic ComNav 1440 electronics package includes: Control Head, Processor, Fluxgate Compass, output for Reversing Drive Units or Solenoid Valves, Rotary or Linear Feedback and all Interconnecting Cables.

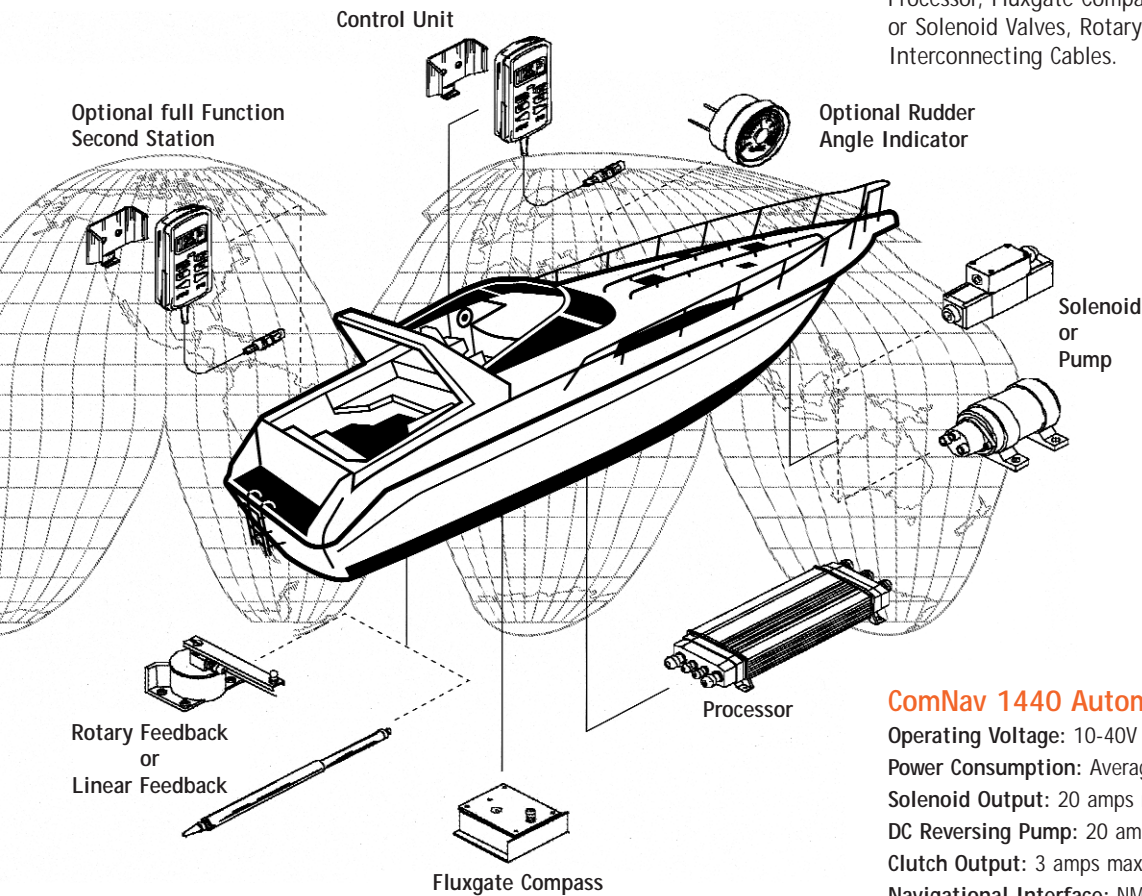

ComNav 1440 Automatic Pilot Specifications

Operating Voltage: 10-40V DC
 Power Consumption: Average 3 amps, 20 amps Peak
 Solenoid Output: 20 amps max.
 DC Reversing Pump: 20 amps max.
 Clutch Output: 3 amps max.
 Navigational Interface: NMEA 0183
 Heading Reference: Fluxgate
 Course Resolution: 1°
 Course Detection: 0.25°

Dimensions

Control Unit: 70mm x 133mm x 25mm / 2.7 x 5.2 x 1.0 inches
 Processor Unit: 160mm x 380mm x 70mm / 6.3 x 15.0 x 2.7 inches
 Fluxgate Compass: 142mm x 107mm x 76mm / 5.6 x 4.2 x 3.0 inches
 Pump: 122mm x 191mm x 102mm / 4.8 x 7.5 x 4.0 inches

Options

Second Location Kit.
 1440 Autopilot fixed/hand held full function second station.
 Rudder Angle Indicator, easy-to-read analog display.
 Rate Stabilized Fluxgate Compass.
 Cable Drives.

ComNav®

ISO 9001



ComNav Marine Ltd.
 #15-13511 Crestwood Place,
 Richmond, British Columbia • Canada • V6V 2G1

Phone: 604-207-1600 • Fax: 604-207-8008
 E-mail: sales@comnav.com

www.comnav.com

Worldwide Service

Printed in Canada

Represented by:

Specifications subject to change without notice